

Rated Loads For Grade 100 (System 10) Alloy Steel Chain Slings


Rated Load for Grade 100 Alloy Steel Chain Slings

Chain Size Nominal	Single Leg Sling - 90° - Horizontal Loading		Rated load Double Leg Sling and Single Basket at Horizontal Angle						Triple and Quadruple Leg Sling and Double Basket at Horizontal Angle							
	in.	mm	lb	kg	60°		45°		30°		60°		45°		30°	
					Double at 60°	Double at 45°	Double at 30°	Quad at 60°	Quad at 45°	Quad at 30°						
					lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg
9/32	7	4,300	1,950	7,400	3,400	6,100	2,750	4,300	1,950	11,200	5,050	9,100	4,150	6,400	2,950	
3/8	10	8,800	4,000	15,200	6,950	12,400	5,650	8,800	4,000	22,900	10,400	18,700	8,500	13,200	6,000	
1/2	13	15,000	6,800	26,000	11,800	21,200	9,600	15,000	6,800	39,000	17,650	31,800	14,450	22,500	10,200	
5/8	16	22,600	10,300	39,100	17,750	32,000	14,500	22,600	10,300	58,700	26,650	47,900	21,750	33,900	15,400	
3/4	20	35,300	16,000	61,100	27,700	49,900	22,650	35,300	16,000	91,700	41,550	74,900	33,950	53,000	24,000	
7/8	22	42,700	19,400	74,000	33,500	60,400	27,350	42,700	19,400	110,900	50,250	90,600	41,050	64,000	29,050	

Rated Loads for Grade 100 Alloy Steel Chain Slings - Choker Hitches

Chain Size Nominal	Single Leg		Double Leg and Single Baskets						Triple and Quadruple Leg; Double Baskets						
	90°		60°		45°		30°		60°		45°		30°		
	in.	mm	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	
9/32	7	3,500	1,600	6,100	2,750	4,900	2,250	3,500	1,600	9,100	4,150	7,400	3,400	5,200	2,400
3/8	10	7,100	3,200	12,300	5,550	10,000	4,550	7,100	3,200	18,400	8,300	15,100	6,800	10,600	4,800
1/2	13	12,000	5,400	20,800	9,450	17,000	7,700	12,000	5,400	31,200	14,150	25,500	11,550	18,000	8,200
5/8	16	18,100	8,200	31,300	14,200	25,600	11,600	18,100	8,200	47,000	21,300	38,400	17,400	27,100	12,300
3/4	20	28,300	12,800	49,000	22,250	40,000	18,150	28,300	12,800	73,500	33,400	60,000	27,250	42,400	19,300
7/8	22	34,200	15,500	59,200	26,850	48,400	21,900	34,200	15,500	88,900	40,250	72,500	32,900	51,300	23,250

Note: Angle of choke should be greater than 120°



Slings

⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:


- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

⚠ WARNING


To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

Cam-Alloy Chain Slings Triple Type: T

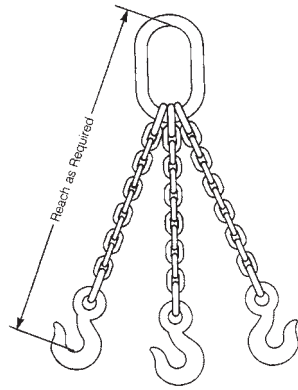

Type TOS

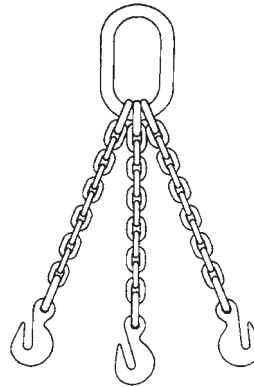

Type TOG

Chain Size		System	Oblong Master Link						Working Load Limit					
			Nominal Size Material		Inside Dimensions				Triple at 60°		Triple at 45°		Triple at 30°	
					Width		Length		lb	kg	lb	kg	lb	kg
in.	mm		in.	mm	in.	mm	in.	mm						
9/32	7	10	13/16	21	3	76	6	152	11,200	5,100	9,100	4,100	6,450	2,900
3/8	10	10	1 1/8	29	4	102	8	203	22,800	10,300	18,600	8,400	13,200	6,000
1/2	13	10	1 1/4	32	4	102	8	203	39,000	17,700	31,800	14,400	22,500	10,200
5/8	16	10	1 5/8	41	5 1/4	133	10 1/2	267	58,700	26,600	47,900	21,700	33,900	15,400
3/4	20	10	1 7/8	48	6	152	12	305	91,700	41,600	74,900	34,000	53,000	24,000
7/8	22	10	2 1/4	57	8	203	16	406	110,900	50,250	90,600	41,050	64,000	29,050
1	26	8	2 1/4	57	8	203	16	406	123,900	56,900	101,200	46,500	71,500	32,800
1 1/4	32	8	2 3/4	70	9	229	16	406	187,800	85,200	153,400	69,600	108,400	49,200

Dimensions are approximate.
Triple chain slings are available in other combinations.
These items are made to order.

Slings

⚠️ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

⚠️ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** if the chain or components are visibly distorted or worn.