


# Magnet Chains (bell type)

The Campbell Magnet Bell

- Alloy casting with no moving parts
- Designed for operational ease and long life
- Supplied with Quik-Alloy® coupling links
- Equally spaced legs
- All legs operate without twist
- Entire assembly is proof tested alloy steel
- Bell stands upright when at rest

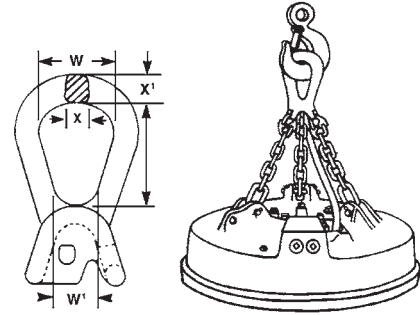

| Chain Size | Cat. No. | UPC No. | Magnet Diameter |           | Standard Total Reach† |        | Length of Two Links |       | Approx. Wgt. of Assy. |     | Approx. Weight Each |     | Working Load Limit |         |        |
|------------|----------|---------|-----------------|-----------|-----------------------|--------|---------------------|-------|-----------------------|-----|---------------------|-----|--------------------|---------|--------|
|            |          |         | in.             | mm        | in.                   | mm     | in.                 | mm    | lb                    | kg  | lb                  | kg  | lb                 | kg      |        |
| 3/4        | 20       | 0431235 | 179938          | 39-44     | 991-1118              | 33 1/2 | 851                 | 4 3/8 | 111                   | 75  | 34                  | 37  | 17                 | 59,700  | 27,100 |
| 7/8        | 22       | 0431435 | 179946          | 44-45     | 1118-1143             | 35 1/2 | 902                 | 4 7/8 | 124                   | 92  | 42                  | 37  | 17                 | 74,700  | 33,900 |
| 1          | 26       | 0431635 | 179952          | 45-60     | 1143 - 1524           | 39 1/2 | 1003                | 5 5/8 | 143                   | 137 | 62                  | 60  | 27                 | 100,600 | 45,700 |
| 1 1/4      | 32       | 0432035 | 179969          | 60 & over | 1524 & over           | 49 1/2 | 1257                | 7     | 178                   | 281 | 127                 | 124 | 56                 | 149,400 | 67,800 |

Bell Type

| Dimensions |    |                 |    |       |    |        |     |     |     |       |     |       |    |                   |    |        |     |                     |     |
|------------|----|-----------------|----|-------|----|--------|-----|-----|-----|-------|-----|-------|----|-------------------|----|--------|-----|---------------------|-----|
| Chain Size |    | Bell Dimensions |    |       |    |        |     |     |     |       |     | Dia.  |    | Inside Dimensions |    |        |     | Length of Two Links |     |
|            |    | X1              |    | X     |    | W      |     | L   |     | W1    |     |       |    | Width             |    | Length |     |                     |     |
| in.        | mm | in.             | mm | in.   | mm | in.    | mm  | in. | mm  | in.   | mm  | in.   | mm | in.               | mm | in.    | mm  | in.                 | mm  |
| 3/4        | 20 | 2               | 51 | 2     | 51 | 4 1/4  | 108 | 7   | 178 | 3     | 76  | 7/8   | 22 | 2                 | 51 | 6      | 152 | 4 3/8               | 111 |
| 7/8        | 22 | 2               | 51 | 2     | 51 | 4 1/4  | 108 | 7   | 178 | 3     | 76  | 1     | 25 | 2 1/8             | 54 | 6      | 152 | 4 7/8               | 124 |
| 1          | 26 | 2 3/4           | 70 | 2 1/4 | 57 | 5 3/16 | 132 | 8   | 203 | 3 1/2 | 89  | 1 1/8 | 29 | 2 1/4             | 57 | 6      | 152 | 5 5/8               | 143 |
| 1 1/4      | 32 | 2 1/2           | 64 | 2 1/2 | 64 | 7 1/2  | 191 | 11  | 279 | 6     | 152 | 1 1/2 | 38 | 2 5/8             | 67 | 7      | 178 | 7                   | 178 |

† Reach shown is standard unless otherwise specified. If additional reach is required, add 2 link increments to each leg. Dimensions and weights are approximate. These items are made to order.

**\*\*Other brands and configurations are available.**